


GB 110

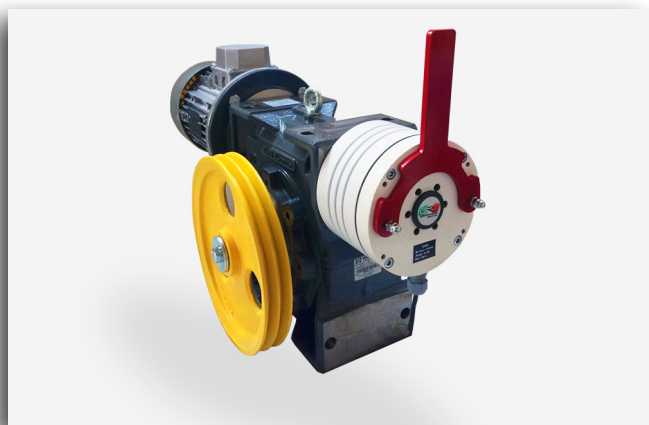

✉ commerciale@gbrelettromeccanica.it

💻 www.gbrelettromeccanica.it

📍 *via Loda, 643
San Cesario sul Panaro
Modena - Italia*

FEATURES

Max. static load **1050 kg**

Max. static load
with external support **1200 kg**

Power range 50 Hz / 4 Poles **2.2 kW**

Power range 60 Hz / 6 Poles **2.2 kW**

Ratio **1:56**

Gear weight **95 kg**

Standard voltage **230/400 V**

Brake powered by motor 220-230-240 Vac
Customized versions on request

Gearbox LH or RH

Lubricated for life

| PULLEY | Ropes | Ropes diameter | Roping system |
|--------|-------|----------------|---------------|
| 260 mm | 2 | 6-8 mm | CSW |
| 320 mm | 2 | 6-8 mm | CSW |
| 360 mm | 2 | 6-8 mm | CSW |

| DRUM | Grooves | Ropes diameter | Max. ropes length |
|--------|---------|----------------|-------------------|
| 210 mm | 1 | 6-7 mm | 17 m |
| 210 mm | 2 | 6-7 mm | 7 m |
| 260 mm | 1 | 6-7 mm | 18.5 m |
| 260 mm | 2 | 6-7 mm | 8 m |

EXTRA

- Ropes protection
- Customized brake voltage
- Pulley external support

NOTES

- Net load in pulley versions:
subtract ropes weight from listed load
- Static load:
car weight + rated load + ropes weight
- Gearbox position: *up*
- System efficiency: *80%*
- Counterweight: *50%*